

POTATO PEELER PI-10 230/50/1

10 Kg. / 22 pounds load per cycle.



P/N 1000651



SALES DESCRIPTION

Stainless steel construction commercial potato peeler.

Also suitable to peel carrots and other similar products.

0-6 min. timer.

Removable plate for easy cleaning.

FEATURES AND BENEFITS

- √ Construction in stainless steel.
- ✓ Lateral stirrers covered with silicon carbide abrasive (approved by NSF).
- ✓ Aluminium base plate lined with silicon carbide abrasive (approved by NSF), easily removable for cleaning purposes.
- ✓ Auto-drag of waste to the drain.
- Energy efficiency owing to engine optimisation.
- ✓ Liftable transparent polycarbonate cover, complete with locking and safety device.
- ✓ Aluminium door with hermetic seal and safety device.
- ✓ Waterproof control board (IP65): Improved reliability against moisture and water splash.
- √ Water inlet system with non-return air break.
- √ Auxiliary contact for external electric valve.
- √ 0-6min timer and possibility of continuous operation.


ACCESSORIES

- Stands for potato peelers
- ☐ Filters for potato peelers









phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty



POTATO PEELER PI-10 230/50/1

10 Kg. / 22 pounds load per cycle.

SPECIFICATIONS

Hourly production: 200 Kg / 240 Kg

Capacity per load: 10 Kg Timer (min-max): 0 ' - 6 ' Total loading: 550 W

Electric power supply (V): 230 V / 50 Hz / 1

~ / (3.5 A)

Plug: -

External dimensions (WxDxH)

- √ Width: 433 mm
- ✓ Depth: 635 mm
- ✓ Height: 625 mm

External dimensions with stand


- √ Width with stand: 433 mm
- ✓ Depth with stand: 638 mm
- √ Height with stand: 1040 mm


Net weight: 36.2 Kg

Crated dimensions

670 x 470 x 810 mm

Gross weight: 43.9 Kg.

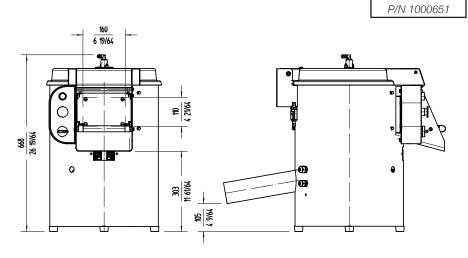





Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty