SMARTVIDE6 230/50-60/1

Max. capacity: 56 lt./14 gal.

P/N 1180020



SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable. Ideal for regeneration.

Interchangeable between °C and °F.

4 user-friendly control buttons.

FEATURES AND BENEFITS

Portable precision cooker with stirrer for up to 56 lt. / 14 gal. containers. Deisgned for chefs, developed with chefs.

- ✓ The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.
- ✓ SmartVide guarantees cooking at a **precisely controlled temperature** while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- ✓ Allows cooking food in their own juice and using this juice immediately after cooking to **enhance flavors**.
- √ Marinates and macerates an ingredient in half the
 time
- ✓ **Infuses and flavors** oil, fat or other products applying the controlled temperature technique.
- ✓ Increses profits due to lack of product shrink.
- ✓ Requires **very little hands-on time**, allowing the Chef to do other tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers **all the information at a glance** makes operation a child's play.
- ✓ SmartVide6 is **portable**: thanks to their ergonomic handle, SmartVide6 can be taken from a container to another easily. Additionally, the optional bag allows easy transport wherever the Chef goes.

Accessories

- ☐ Insulated tank for SmartVide immersion circulator
- ☐ Lid for SmartVide
- ☐ Floating balls for SmartVide
- ☐ SmartVide transport bag









phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved

FOOD PRESERVATION AND SOUS-VIDE SOUS-VIDE COOKERS

P/N 1180020

SMARTVIDE6 230/50-60/1

Max. capacity: 56 lt./14 gal.



SPECIFICATIONS

Temperature

Display precision: 0.01 °C

Range: 5 °C - 95 °C

Permissible ambient temperature: 5 $^{\circ}\text{C}$ - 40

 $^{\circ}$ C

Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 56 l

Total loading: 2000 W (8 A)

Electrical supply: 230 V / 50-60 Hz / 1 \sim

Plug: EU

Submergible part dimensions: 117 mm x

110 mm x 147 mm

External dimensions (WxDxH): 124 mm \times


 $140\,\text{mm}\,x\,360\,\text{mm}$


Net weight: 3.6 Kg

Crated dimensions

440 x 190 x 310 mm

Gross weight: 5.5 Kg.

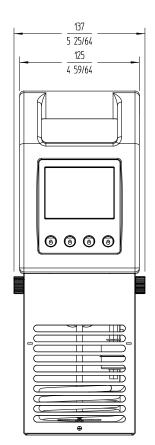

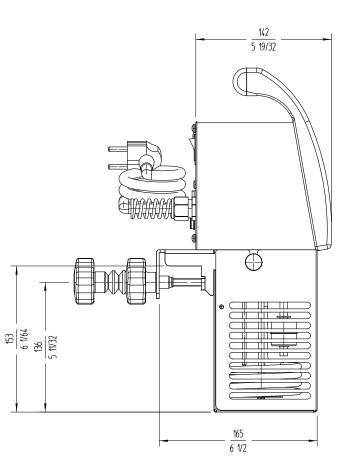



Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



	Project	Date
	Item	Qty
	Approved	

product sheet updated 02/08/2019