



# VACUUM PACKING MACHINE SU-606 230-400/50/3N

Floorstanding unit. 63 m³/h. 413+656 mm.



P/N 1140835

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE



## FEATURES AND BENEFITS

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

## SALES DESCRIPTION

Two sealing bars (413+656 mm.)  
63 m³/h Busch vacuum pump.  
Vacuum controlled by sensor.

## INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

## ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ CG2 Desktop printer for SU vacuum packing machines \*
- ☐ Thermal labels for CG2 printer
- ☐ RB Desktop printer for SU vacuum packing machines \*
- ☐ Thermal transfer labels for printer



**sammic** | [www.sammic.com](http://www.sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1.  
20720 Azkoitia, Spain

phone +34 943 15 72 36  
[sales@sammic.com](mailto:sales@sammic.com)



Project

Date

Item

Qty

Approved

product sheet  
updated 22/03/2019



# VACUUM PACKING MACHINE SU-606 230-400/50/3N

Floorstanding unit. 63 m<sup>3</sup>/h. 413+656 mm.



P/N 1140835

## SPECIFICATIONS

Pump capacity: 63 m<sup>3</sup>/h

Bar length: 413 mm + 656 mm

Total loading: 1500 W

Vacuum pressure (maximum): 0.5 mbar

Electrical supply: 400 V-[v:002\_tension2] /  
50 Hz / 3N ~ (6.7 A)

### Internal dimensions

✓ Width: 672 mm

✓ Depth: 481 mm

✓ Height: 200 mm

### External dimensions (WxDxH)

✓ Width: 740 mm

✓ Depth: 566 mm

✓ Height: 997 mm

Net weight: 159 Kg


Noise level (1m.): 75 dB(A)

Background noise: 32 dB(A)

### Crated dimensions

670 x 830 x 1200 mm

Gross weight: 173 Kg.

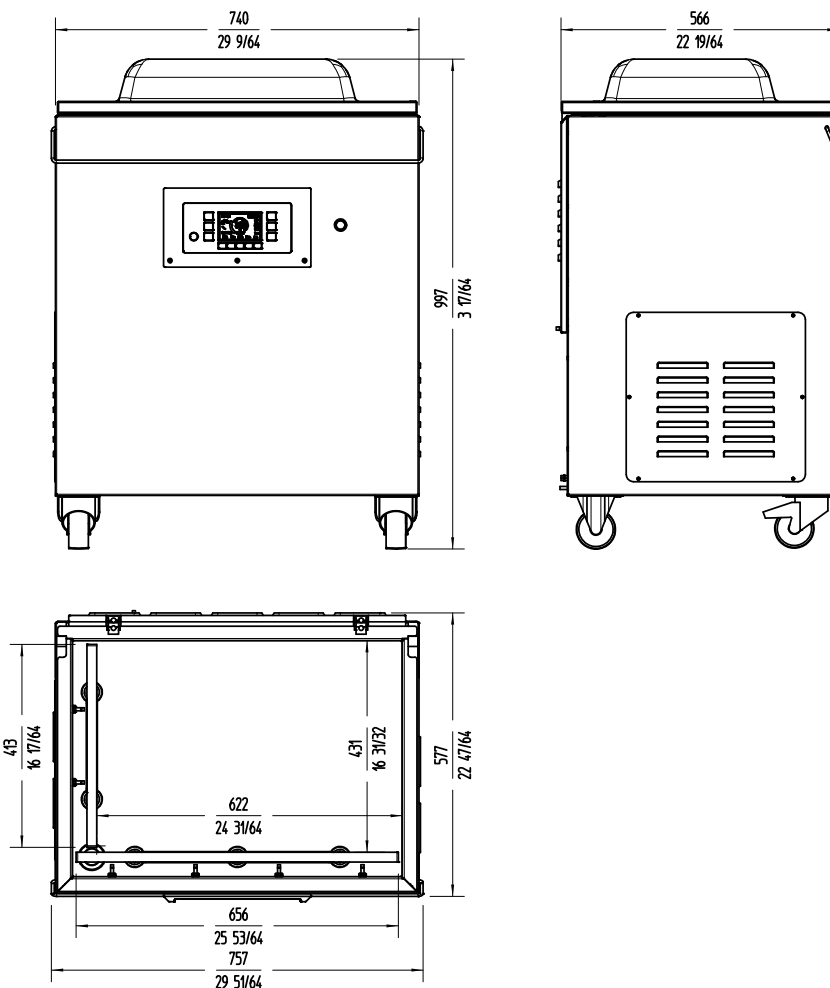

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

**sammic** | [www.sammic.com](http://www.sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1.  
20720 Azkoitia, Spain

phone +34 943 15 72 36  
[sales@sammic.com](mailto:sales@sammic.com)



Project

Date

Item

Qty

Approved

product sheet  
updated 22/03/2019